

# APEX® SERIES



Powered by  
**Kawasaki**

**4** YEAR\*  
OR  
500 HOURS  
WARRANTY



## A LOT OF MACHINE FOR THE MONEY

The Ariens APEX is the star pupil in its class. It is made for users who have a lot to mow. It doesn't matter if you are a service provider or a private user with large grounds. In all aspects, it is professional – the frame, the engine, the wheel motors and especially the cutter deck. The frame and deck are from its big brother, the ZENITH. For years, APEX has offered top-class value for money.

## MODEL OVERVIEW

	APEX 48	APEX 48R	APEX 52	APEX 52R
MODEL	991324	991325	991326	991327
ENGINE	Kawasaki® FR691 V-Twin 726cc			
CUTTING WIDTH	122cm (48")	122cm (48")	132cm (52")	132cm (52")
DECK TYPE	Side discharge	Rear discharge	Side discharge	Rear discharge
MULCH KIT (OPTIONAL)	Yes	No	Yes	No
MAX GROUND SPEED (FWD/REV)	12.9km/h (8mph) / 6.4km/h (4mph)			

Accessories: page 56 / 57, specifications: page 66



# FEATURES & BENEFITS

## APEX ZERO-TURN




### KAWASAKI ENGINE

High-quality Kawasaki FR691V  
V-engine with 726 cc displacement.  
Reliable all-day power.



### PROFESSIONAL CUTTER DECKS

APEX cutter decks are identical to the decks found on the ZENITH. They are suspended from four fixed points. Once adjusted, they maintain their parallelism without warping. A 13 mm thick steel edge protects the front and sides. The blade spindles are made of cold forged aluminium. These are more vibration resistant than castings and run up to 12°C cooler than steel spindles. With a depth of 14 cm, the deck allows a strong airflow for optimal cutting.

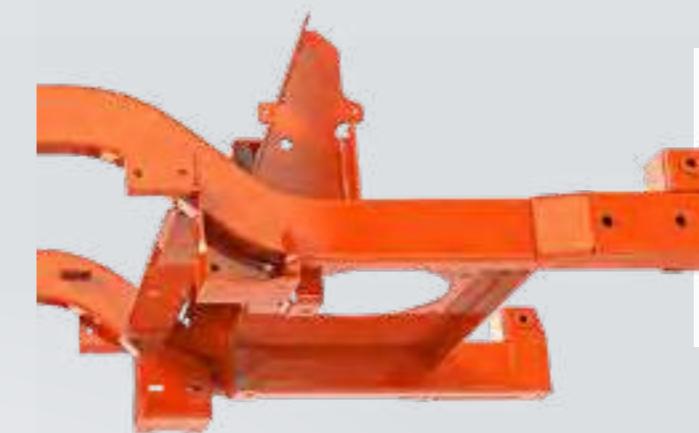

### ONE-PIECE TUBULAR FRAME

A large 3"x 1" box section tubular chassis with minimal welds carries the loads of the machine with unparalleled strength and stability.



### CONSTANT BELT TENSION (CBT)

The self-adjusting belt tension technology in CBT keeps belt tension constant, which maximises belt life, minimises wear and maintains a consistent, quality cut.



### NEW ERGONOMIC CONTROL LEVERS

Thanks to their ergonomic shape the new steering levers fit perfectly in the hand.



### HYDRO-TRANSAXLES

Two HydroGear™ ZT 3100 commercial hydraulic motors deliver up to 474 Nm of torque. Sensitive, responsive for smooth operation. Maintenance interval 400 hours, after the first oil change.

### COMFORT SEAT

APEX is equipped with a thickly padded seat with a high backrest. The armrests are also thickly padded. The operator position is adjustable.

# IKON SERIES



**3 YEAR\***  
OR  
**300 HOURS**  
WARRANTY

Powered by  
**Kawasaki**

## MOW LARGE GARDENS QUICKLY AND COMFORTABLY

The newest and fastest way to mow your lawn. No matter how big your garden is. The new Ariens IKON sets new standards in terms of cutting pattern, comfort and features. The new Ariens IKON is difficult to categorise. It blurs the line between a mower for private users and a professional mower. The industry leading design and performance will set it apart from the rest. Discover it – for yourself!

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.



## MODEL OVERVIEW

	IKON 42	IKON 52
MODEL	918300	918301
ENGINE	Kawasaki® FR651 726cc	Kawasaki® FR691 726cc
CUTTING WIDTH	107cm (42")	132cm (52")
DECK TYPE	Side discharge	Side discharge
MULCH KIT (OPTIONAL)	Yes	Yes
MAX GROUND SPEED (FWD/REV)	11.2km/h (7mph) / 4.8km/h (3mph)	11.2km/h (7mph) / 4.8km/h (3mph)

Accessories: page 56 / 57, specifications: page 67



# FEATURES & BENEFITS

## IKON ZERO-TURN



### CAREFREE WHEEL DRIVE:

The two separate hydrostatic EZT® wheel motors from HYDRO-GEAR® are service-free and guarantee a smooth driving experience.



### POWER RESERVES AND RELIABILITY

The Kawasaki® FR engine series on the IKON is the top benchmark in its class. It delivers the power and performance needed in the toughest conditions.



The new Ariens ENVY™ mower deck has it all. We have put all our experience into its new design.

- **Durability:** 2.9 mm sheet steel, solid edge protection, fully welded.
- **Constant high quality of cut:** 4-point suspension for permanent fixation and parallelism.

### WHAT GOOD IS A MOWER IF IT DOESN'T MOW?

- **Three caged anti-scalp wheels:** The integrated anti-scalp wheels prevent damage to the lawn and the machine in the event of ground contact.
- **Robust 3-blade cutting system:** Blade spindles made of forged aluminium. Cooler running and more impact and vibration resistant than cast spindles.
- **Optimised airflow:** The Ariens ENVY™ mower deck has an optimised airflow thanks to new baffles and an improved discharge. Essential for its excellent cutting pattern.

### STABILITY AND DURABILITY:

As with the professional series, the IKON has a fully welded tubular frame.



### SEATING COMFORT

An extra high backrest supports the back. The raised seat base makes it easier to stand up and sit down. Folding armrests relieve pressure on the shoulders. Imitation leather upholstery with decorative stitching.



### FOOT-OPERATED DECK ADJUSTMENT

Stability has its weight. The solid mower deck is simply lifted by foot pedal while seated. Also available with optional spring support on request.



### ERGONOMIC AND ADJUSTABLE CONTROL LEVERS

The new Ariens drive levers allow precise, tool-free adjustment of the drive levers in all four directions.



### EXTRA LARGE WHEELS

20" wheels ensure high suspension comfort, strong traction and low ground pressure. They also make it easier to drive over edges. Recommended tyre pressure: 0.6 – 0.75 bar.



### INTEGRATED AND INTUITIVE BRAKE

The parking brake is activated by simply folding out the drive levers.



### CHARGING AND STOWING

Drinks and mobile phones can be stored in the practical storage box. Two USB charging sockets are standard (USB-A and USB-C).



### CUTTING HEIGHT ADJUSTMENT

A magnetic bolt allows you to conveniently select one of the 13 cutting heights from a seated position.



### DUAL LED FRONT LIGHTS

Standard, integrated, super-bright front lights with 600 lumens show the way.

# EDGE SERIES



**2 YEAR\***  
OR  
150 HOURS  
WARRANTY



## ENJOY ALL THE ADVANTAGES OF A ZERO-TURN ON YOUR LAWN

Zero-turn mowers are not just for large areas. With its compact dimensions, the EDGE brings speed and manoeuvrability to even the most winding gardens. In the 86 cm cutting width it is equipped with a stamped mower deck and in the 107 cm cutting width with a welded mower deck. A robust 4-point cutter deck suspension and cutting height adjustment via foot pedal are standard. A comfortable seat with a cut-out back and good legroom ensure comfort. Its maintenance-free wheel drive reduces maintenance intervals. The EDGE is powered by an Ariens 2-cylinder 635 cc engine.

## MODEL OVERVIEW


	EDGE 34	EDGE 42
MODEL	915338	915339
ENGINE	Ariens 635cc	Ariens 635cc
CUTTING WIDTH	86cm (34")	107cm (42")
DECK TYPE	Side discharge	Side discharge
MULCH KIT (OPTIONAL)	Yes	Yes
MAX GROUND SPEED (FWD/REV)	9.6km/h (6mph) / 4.8km/h (3mph)	9.6km/h (6mph) / 4.8km/h (3mph)

Accessories: page 56 / 57, specifications: page 67



# FEATURES & BENEFITS

## EDGE ZERO-TURN

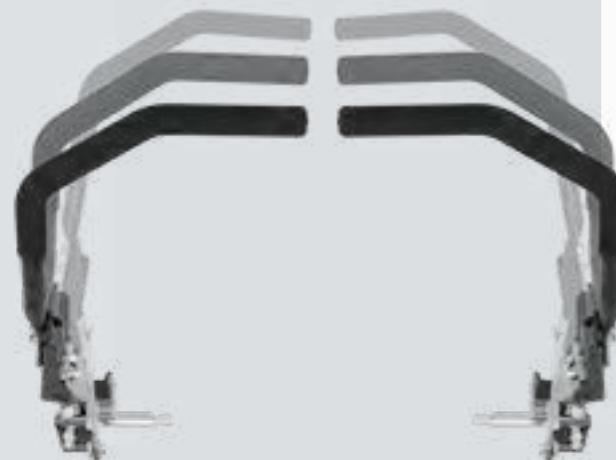

### INTUITIVE CONTROL

Anyone can drive a zero-turn. After just 20 minutes, you will love the precision and sensitivity. Each wheel motor can be controlled individually and independently of the other. This makes a 360° zero-turn possible.



### HYDRO-TRANSAXLES

Two HydroGear™ EZT hydraulic transmissions are maintenance-free and reliable




### COMPACT CUTTER DECKS

Choose between cutting widths of 86 cm or 107 cm. With the optional mulching kit fitted, the side discharge deflector can also be removed and the overall width is reduced. Advantageous for narrow passages.



### 4-POINT CUTTER DECK SUSPENSION

The four-point deck lift system offers unmatched stability and consistent cutting

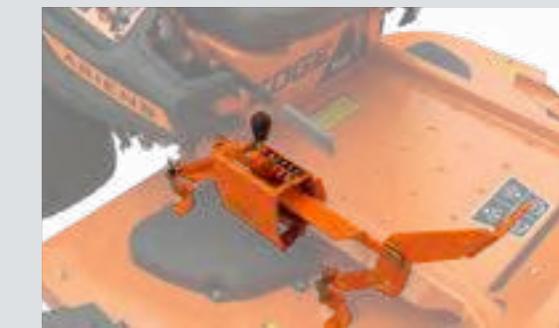

### CUTTING HEIGHT ADJUSTMENT

A simple and intuitive foot-operated deck lifting system offers effortless adjustment to seven cutting positions.



### POWERFUL ENGINE

The powerful Ariens 635 cc engine has earned a reputation for reliability and performance over the years.



### COMFORTABLE SEAT

The EDGE is equipped with a padded seat with a cut-out back for better ventilation. It is adjustable for the operator.



# STAND-ON ZERO-TURN MOWER

THE PROFESSIONAL'S CHOICE

**NEW:** THE COMFORT AND SPEED OF A  
ZERO-TURN MOWER **PLUS**

**+** **COMPACT DIMENSIONS**

Especially short and low construction. With a cutting width of 81 or 91 cm, ideal for small, medium and narrow access areas. Saves space and weight during transport.

**+** **AGILE HANDLING**

Manoeuvres around obstacles tightly and quickly due to a low centre of gravity and low height. Suitable for mowing across slopes up to 20°.

**+** **ERGONOMIC WORKING POSITION**

Upright driving position on a sprung footboard. Gentle on the back and less tiring. Provides a sense of security for the operator.

**+** **PRACTICAL HANDLING**

Easy and quick mounting and dismounting. Removing obstacles. Operating the machine with the footboard raised in tight, low and steep situations.

**+** **BETTER VISIBILITY**

Cutter deck fully visible to the operator. Precise driving along edges. Reduces annoying 'touch-up' work and minimises risk of collisions.

# ARROW E SERIES



POWERED BY  
**FUSIONCORE**



## A NEW LEVEL OF MANOEUVRABILITY AND ERGONOMICS - FULLY ELECTRIC

Two current trends are coming together. The increasing demand for professional battery mowers and the easy handling of a stand-on mower. The new ARROW E uses the proven Ariens FusionCore swappable battery system and is compatible with all ZENITH E models.

**3** YEAR\*  
BATTERY  
WARRANTY

**5** YEAR\*  
OR  
1500 HOURS  
WARRANTY

NO  
HOUR  
LIMIT  
FOR FIRST  
TWO YEARS

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.



## MODEL OVERVIEW

	ARROW E 48	ARROW E 48 R	ARROW E 52	ARROW E 52 R
MODEL	998301	998304	998302	998305
BATTERY TYPE	56V Li-Ion FusionCore Swappable 4x 4 kWh			
CUTTING WIDTH	122cm (48")	122cm (48")	132cm (52")	132cm (52")
DECK TYPE	Side discharge	Rear discharge	Side discharge	Rear discharge
MULCH KIT (OPTIONAL)	Yes	No	Yes	No
MAX GROUND SPEED (FWD/REV)	17.7km/h / 8.8km/h (11mph / 5.5mph)			

Accessories: page 56 / 57, specifications: page 63



# FEATURES & **BENEFITS**

## ARROW E BATTERY STAND-ON



### FOOT-ASSISTED CUTTER DECK ADJUSTMENT

Quality has its weight. The solid cutter deck of the ARROW E is welded from 4.5 mm thick sheet steel. The height of the deck is adjusted smoothly via a combined system of foot pedal and hand lever.



### SPINDLE MOTORS WITH SLIPPING CLUTCH

The high performance brushless blade spindle motors are equipped with a slip clutch. In the event of a collision with a solid object, it allows the blade to "slip through" and thus protect the motor from damage. If required, the cutter shafts and lower bearings are replaceable.



### LED-DISPLAY / INTERFACE

The colour LED display keeps you constantly informed. Charging state of batteries. Operating modes. Operating hours counter. System diagnosis and fault messages.



### INTUITIVE CONTROLS

All functions of the machine are in the field of vision and within reach of the operator. The maximum travel speed can be limited via a quick-action mechanism with magnetic plug. Electric parking brake and two driving speed levels.



### ECO MODE - DON'T WASTE ENERGY

The ARROW E has an ECO mode switch. When there is little grass or when travelling at a slower speed, the highest blade speed is not required. In this case, use the ECO mode to reduce the blade speed to prolong battery life.



### QUICKSWAP BATTERY CHANGING SYSTEM

The ARROW E uses the same four 56V battery packs as the ZENITH E. Even with only two batteries, moving can be done at full power. Even a single battery pack is sufficient for transporting the machine. Fast charging of the four batteries from 0-100% in only 5.3 hours.



### FOLDING DRIVER'S PLATFORM

The spring-loaded driver's platform can be folded upwards for transport. It can also be used when working under low-hanging branches or when driving across slopes of up to 20°. In no time, the ARROW E becomes a hand-guided "walk-behind" mower.

# ARROW SERIES



Powered by  
**Kawasaki**

**5** YEAR\*  
OR  
1000 HOURS  
WARRANTY | NO  
HOUR  
LIMIT  
FOR FIRST  
TWO YEARS



## ACCESS ALL AREAS

The ARROW offers the advantages of a zero-turn mower, but with the compact dimensions of a large walk-behind mower and a near perfect view of the area to be mowed and the cutter deck. The ARROW combines the best of both worlds and can mow larger lawns as well as narrow areas, between beds and in tight spaces. As the name suggests, the ARROW offers both speed and precision. In daily use, you will appreciate the easy mounting and dismounting and its small footprint on a trailer.

## MODEL OVERVIEW

	ARROW 32	ARROW 36
MODEL	994302	994303
ENGINE	Kawasaki® FS600 V-Twin 603cc	Kawasaki® FS600 V-Twin 603cc
CUTTING WIDTH	81cm (32")	91cm (36")
MULCH KIT (OPTIONAL)	Yes	Yes
MAX GROUND SPEED (FWD/REV)	12.8km/h (8mph) / 4.8km/h (3mph)	12.8km/h (8mph) / 4.8km/h (3mph)

Accessories: page 56 / 57, specifications: page 65



# FEATURES & BENEFITS

## ARROW STAND-ON



### DASHBOARD

The operator has everything in view and under control. Throttle, choke, fuel gauge, drive levers, cutting height adjustment and parking brake. An adjustable cruise bar allows the speed to be limited according to the area of use.



### LOW CENTRE OF GRAVITY

The ARROW is suitable for driving across slopes up to 20°. The standing working position gives the operator direct control of the machine. In particularly tight situations, the machine can be guided by hand with the platform folded up.



### EXCELLENT VISIBILITY

From the operator's position, the entire cutter deck can be seen. This enables precise driving around obstacles





### FITS THROUGH NARROW AREAS AND GATES

Both the 81cm (32") and the 91cm (36") cutter deck allow access to twisty and narrow gardens. The ARROW is the most compact zero-turn mower from Ariens. Due to its high ground speed, it also works well in medium-sized areas.

### HEAVY DUTY MOWER DECK

On any mower, the cutter deck is the most stressed part, especially in daily, commercial use. The ARROW is made for that. Its cutting deck is made of 4.5 mm thick welded sheet steel.


The highly stable blade supports are made of forged aluminium and offer greater strength than comparable cast parts. A foot-assisted height adjustment facilitates operation

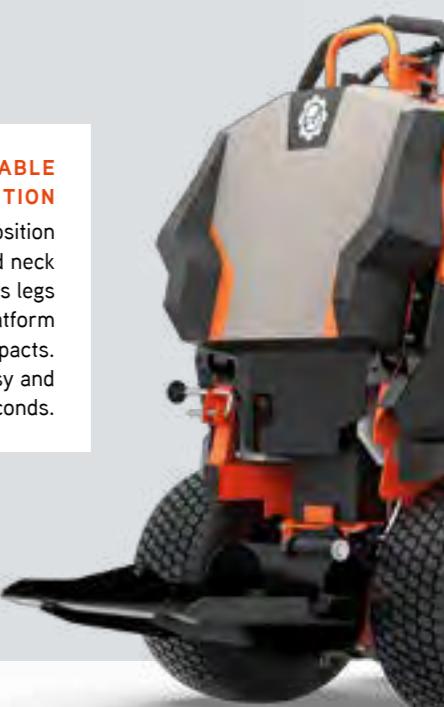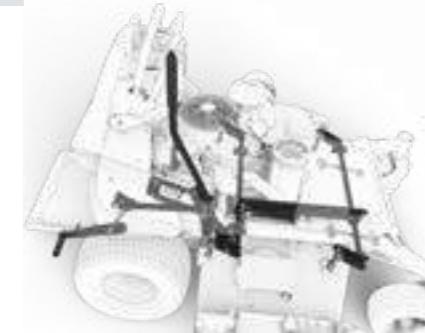

# ACCESSORIES OVERVIEW

	NEW!	NEW!	SUMMIT PRO 300	SUMMIT PRO 500	ZENITH E	ZENITH	APEX	IKON	IKON XD	EDGE	ARROW E	ARROW
<b>MULCH KIT WITH BLADES</b> (only for models with side discharge)	48": 79109600 52": 79220200 60": 79220300	60": 79220300 72": 79220400	48": 79701800 52": 79701900 60": 79702000 model 997305	52": 79105800 60": 79105900	48": 79105700 52": 79105800	-	-	42": 71513900 52": 71514000	34": 71510800 42": 71516000	48": 79701800 52": 79800100	32": 79403200 36": 79403300	
<b>MULCHKIT WITHOUT BLADES</b>	-	-	-	-	-	-	42": 71803100 52": 71803200 Mulching blade is standard	-	-	-	-	
<b>STRIPING KIT</b>	79221800	79221800	79221800	79206700	79206700	71800500	79206700	-	-	-	-	
<b>TRAILER HITCH KIT</b>	79215800	79215800	79202300	79202300	79202300	71801300	71514900	71502800	-	-	-	
<b>MOWER DECK TRANSPORT LOCK KIT</b>	-	-	-	-	-	71800600	-	-	-	-	-	
<b>DECK LIFT SPRING ASSIST KIT</b>	-	-	-	-	-	71801600	-	-	-	-	-	
<b>DECK BUMPER KIT</b>	-	-	-	-	-	71516400	-	-	-	-	-	
<b>OPERATOR CONTROLLED CHUTE BAFFLE FOR SIDE DISCHARGE MODELS</b>	48": 79223400 52"/60": 79223700	60"/72": 79223700	79110000	79110000	79110000	-	-	-	-	79110000	79110000	
<b>ROPS (ROLL OVER PROTECTION STRUCTURE) WITH SEAT BELT</b>	-	-	-	-	89101100	-	-	-	-	-	-	
<b>ELECTRIC DECK LIFT</b>	79221100	79221100	-	-	-	-	-	-	-	-	-	
<b>ENTRY ASSIST HANDLE KIT</b>	71801200	71801200	-	-	-	-	-	-	-	-	-	
<b>FLEXTEND SHOULDER SUPPORT</b>	-	-	-	-	-	-	-	79102300	-	-	-	
<b>ARM REST KIT</b>	-	-	-	-	-	-	-	71508400	-	-	-	
<b>SEAT ISOLATOR KIT</b>	-	-	-	-	79110500	71801900	-	-	-	-	-	
<b>SEAT SPRING KIT</b>	-	-	-	-	79107000	-	-	-	-	-	-	
<b>SUSPENSION FORKS KIT</b>	-	-	79108300 (79703000 model 997201/997302)	-	79109000	-	-	-	-	79108300	-	
<b>FULL SUSPENSION SEAT</b>	-	-	-	standard	79111300	-	-	-	-	-	-	
<b>AIR-RIDE AIR SUSPENSION SEAT</b>	79225400	standard	-	-	-	-	-	-	-	-	-	
<b>LED FRONT LIGHTING KIT</b>	79222900	79222900	79700400	79108600	79108600	standard	71514100	71517600	-	-	-	
<b>USB PORT ADAPTER KIT</b>	-	-	-	79111200	79111200	-	-	-	-	-	-	
<b>12V POWER OUTLET</b>	79225300	79225300	-	-	-	-	-	-	-	-	-	
<b>RUBBER MAT</b>	-	-	79110800	79110800	79110800	71801400	70714300	-	-	-	-	
<b>TRIMMER MOUNT KIT</b>	-	-	-	-	-	-	-	-	-	-	79403800	
<b>COVER FOR ALL RIDE-ON ZT-MOWERS UP TO 60"</b>	71515200	60": 71515200	71515200	71515200	71515200	71515200	71515200	71515200	71515200	-	71515200	
<b>DOUBLE ANTI-SCALP WHEEL KIT</b>	71517400	71517400	71517400	71517400	71517400	-	-	-	-	71517400	71517400	
<b>MICHELIN TWEEL FRONT CASTER KIT 13"</b>	79223600	79223600	-	79110900	79110900	-	-	-	-	-	-	
<b>MICHELIN TWEEL KIT REAR (SET OF 2)</b>	79219600	79220500	79702900	79702900	79702900	-	-	-	-	-	-	
<b>AGGRESSIVE PROFILE REAR TYRE KIT (SET OF 2)</b>	79205200	-	-	79108900	79108900	-	-	-	-	-	-	
<b>13" SEMI-PNEUMATIC FRONT WHEEL KIT (SET OF 2)</b>	standard 15"	standard 15"	79105200	79105200	79105200	-	-	-	-	standard	standard 11"	
<b>SUNSHADE KIT ROPS MOUNTED</b>	-	-	-	79212600	-	-	-	-	-	-	-	
<b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITHOUT BATTERIES</b>	-	-	89700300	-	-	-	-	-	-	89700300	-	
<b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITH 2 BATTERIES</b>	-	-	G10199006	-	-	-	-	-	-	G10199006	-	
<b>MOBILE OFF-BOARD CHARGER FUSIONCORE WITH 4 BATTERIES</b>	-	-	G10199004	-	-	-	-	-	-	G10199004	-	
<b>BATTERY PACK FUSION CORE 56V 4KWH 1 PIECE</b>	-	-	1 pc.: 89700100 2 pcs.: G10199005 4 pcs.: G10199007	-	-	-	-	-	-	1 pc.: 89700100 2 pcs.: G10199005 4 pcs.: G10199007	-	
<b>FAST CHARGER FUSIONCORE WITH Y-HARNESS</b>	-	-	79701300	-	-	-	-	-	-	79701300	-	
<b>STANDARD CHARGER FUSIONCORE</b>	-	-	79700600	-	-	-	-	-	-	79700600	-	
<b>Y-HARNESS KIT FOR COUPLING TWO STANDARD CHARGERS</b>	-	-	9189200 (PAM)	-	-	-	-	-	-	9189200 (PAM)	-	
<b>BEACON LIGHT LED</b>	-	-	79700500	-	-	-	-	-	-	-	-	
<b>BEACON LIGHT LED FOR ROAD HOMOLOGATION KIT</b>	-	-	G10199000	G10199000	-	-	-	-	-	-	-	
<b>ROAD HOMOLOGATION KIT (ECE compliant components)</b>	-	-	G10199002 (national individual approval required)	G10199001 (national individual approval required)	-	-	-	-	-	-	-	
<b>TYRE SEALANT "AS PLATTFUSS-STOP", 950 ML (sufficient for two front tyres or one rear tyre)</b>	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	G00041068	

## ZENITH E ACCESSORIES

	<b>56V BATTERY KITS</b> Additional FusionCore 56V Li-Ion swappable battery, 4,0 kWh. <ul style="list-style-type: none"><li>- Single battery</li><li>- Kit of 2 or 4 batteries</li><li>- Kit of 2 or 4 batteries incl. offboard charger kit</li></ul>		<b>OFF BOARD CHARGER KIT</b> Charge up to four additional batteries outside of the machine. Charging time 4 batteries 0-100%: 12 hours. Option to upgrade to Fast Charger. Also available as kit with 2 or 4 batteries.
	<b>FAST CHARGER WITH Y HARNESS KIT</b> Additional charger. Charges the four batteries in the machine in just 5.3 hours.		<b>MULCH KIT</b> For installation in side discharge cutter decks. Ensures a clean mulching result. Closes the side discharge. Side deflector can then be removed.
	<b>OPERATOR CONTROLLED CHUTE BAFFLE</b> For all side discharge cutter decks. Controls the ejection distance of the clippings with a hand lever.		<b>STRIPING KIT</b> Creates a striped lawn. For side discharge/mulch kit models.
	<b>FLOOR MAT</b> Increases riding comfort. The mat absorbs vibrations at the feet and prevents slipping while riding and when getting on and off. Weatherproof, made of 100% rubber.		<b>SUSPENSION FORKS KIT</b> Reduces vibrations and shocks for increased operator comfort. Matched to the weight of the ZENITH E.
	<b>13" SEMI-PNEUMATIC FRONT TYRE KIT</b> Puncture proof.		<b>"TWEELS" KIT</b> Lasts as long as 2-3 conventional sets of pneumatic tyres. 100% puncture proof.
	<b>LED HEADLIGHT KIT</b> For mounting on the side frame.		<b>BEACON LIGHT KIT</b> LED warning light for mounting on the ROPS rollover protection. Increases visibility.
	<b>ROAD HOMOLOGATION KIT</b> Lighting kit is available for use on public roads. Installation by specialised dealers. National individual road approval required. ECE compliant components.		<b>BEACON LIGHT LED KIT</b> Optional 360° LED rotating beacon light. Use in combination with road homologation kit.

“ We find that Ariens' machines are built to a very high standard and are competitively priced. The very positive feedback we get from our customers, cements our confidence in the brand. We believe Ariens are the market leader for zero-turns in the UK and we're proud to be a dealer.

**MARK AND AMANDA BROWN**  
M&A BROWN & SONS



## WHAT DO OUR DEALERS SAY ABOUT ARIENS PRODUCTS?



“ Ariens machines are reliable, offer value for money and provide excellent performance even in demanding conditions.

**DAVID WEBSTER**  
MOWERPOWER LTD



“ Arthur Ibbett Ltd have been an Ariens dealer for 40 years now and will continue to be as they offer a great range of machines at an affordable price.

**LOUISE DANBURY-PETERS**  
ARTHUR IBBETT LTD

# ZERO-TURN ACCESSORIES

More accessories see page 50

 <p><b>MULCHING KIT WITH BLADES</b> When using the optional mulching kit, baffles are screwed into the prepared mower deck and form separate mulching sections in the deck. The material being mowed is finely shredded and remains on the surface. For <b>ALL MODELS</b> with side discharge</p>	 <p><b>LAWN STRIPING - KIT</b> Creates an appealing striped look, just like on a football pitch. For <b>SUMMIT PRO, ZENITH, ZENITH E, APEX, IKON</b></p>	 <p><b>TRIMMER MOUNT KIT</b> Take your trimmer with you. For <b>ARROW</b></p>	 <p><b>TYRE SEALANT</b> Quickly seals and eliminates punctures in all tyres.</p>	 <p><b>"TWEELS®" AIR-LESS REAR WHEEL KIT</b> High mileage of up to four standard tyre sets and full puncture protection. For <b>SUMMIT PRO, ZENITH E, ZENITH, APEX</b></p>
 <p><b>OPERATOR-CONTROLLED SIDE DISCHARGE</b> Adjust the throw range of the side discharge during mowing. Close it completely if necessary. For all side discharge mowers decks of <b>SUMMIT PRO, ZENITH, ZENITH E, APEX, ARROW, ARROW E</b></p>	 <p><b>SUSPENSION FORKS KIT</b> Reduces vibrations and shocks for increased driving comfort For <b>APEX, ZENITH E, ARROW E</b></p>	 <p><b>HIGH PROFILE "BAR TYRE" WHEEL KIT</b> For increased traction on wet soils. Agricultural tread. For <b>SUMMIT PRO 300, ZENITH, APEX</b></p>	 <p><b>13" SEMI-PNEUMATIC FRONT WHEEL KIT</b> Never run flat again. For <b>ZENITH E, ZENITH, APEX</b></p>	
 <p><b>FULL SUSPENSION SEAT KIT</b> Replaces standard seat. Fully adjustable integrated seat suspension. For <b>APEX</b></p> <p><b>AIR-RIDE SEAT</b> Variable pneumatic suspension with adjustable arm rests and lumbar support. For <b>SUMMIT PRO 300</b></p>	 <p><b>SEAT ISOLATOR</b> Rubber elements reduce vibrations. For <b>APEX, IKON</b></p> <p><b>SEAT SPRING KIT</b> For a more comfortable ride. For <b>APEX</b></p>	 <p><b>ROAD HOMOLOGATION KIT</b> Lighting kit is available for use on public roads. Installation by specialised dealers. National individual road approval required. German TÜV certificate available. ECE compliant components. For <b>ZENITH, ZENITH E</b></p>	 <p><b>BEACON LIGHT LED KIT</b> Optional 360° LED rotating beacon light. Use in combination with road homologation kit. For <b>ZENITH, ZENITH E</b></p>	
 <p><b>HITCH KITS</b> Transform your Ariens zero-turn into a versatile machine simply by adding the hitch. The kit's robust design allows you to tow a range of accessories. For <b>SUMMIT PRO, ZENITH, APEX, IKON, EDGE</b></p>	 <p><b>FLOOR MAT</b> Increases driving comfort. The mat absorbs vibrations on the feet and prevents feet from slipping while driving and when dismounting. 100% weatherproof rubber. Easy to remove for cleaning. For <b>IKON, APEX, ZENITH</b></p>	 <p><b>ZERO-TURN COVER</b> Protect your investment and extend the life of your equipment with an Ariens zero-turn cover. Fits all models with 60" mower deck.</p>	 <p><b>ROPS KIT</b> Increases security for the operator. Ergonomic shape protects the driver's elbows from impact. For <b>APEX</b></p>	
 <p><b>FLEXTEND™ SHOULDER SUPPORT SYSTEM</b> Gives additional support to the shoulder area when mowing for extended periods. For <b>EDGE</b></p> <p><b>ARM REST KIT</b> For <b>EDGE</b></p>	 <p><b>LED HEADLIGHT - KIT</b> Two extra bright front lights. With switch. Easy installation thanks to existing wiring. For <b>SUMMIT PRO, ZENITH, ZENITH E, APEX</b></p> <p><b>LED FRONT LIGHT KIT</b> To be mounted on front frame. For <b>EDGE</b></p>	 <p><b>ELECTRIC DECK LIFT KIT</b> You can adjust the deck at the touch of a button. Either to the highest transport position or to your set cutting height. Replaces the foot pedal. For <b>SUMMIT PRO</b></p>	 <p><b>ENTRY ASSIST HANDLE KIT</b> Practical metal bar with handle makes it easier to get on and off the machine regularly. For <b>SUMMIT PRO</b></p>	
	 <p><b>12 VOLT OUTLET SOCKET</b> Charge your mobile phone using the optional charging socket. For <b>SUMMIT PRO</b></p> <p><b>USB-ADAPTER</b> For <b>APEX, ZENITH</b></p>	 <p><b>TRANSPORT DECK LOCK, SPRING SUPPORT DECK, DECK BUMPER</b> For the mower deck of the new <b>IKON</b></p>		

# SPECIFICATIONS\*\*

	ZENITH E 48	ZENITH E 48R	ZENITH E 52	ZENITH E 52R	ZENITH E 60	ZENITH E 60R
MODEL #	997303	997306	997304	997307	997305	997308
BATTERY TYPE	56V FusionCore Lithium Ion Swappable					
BATTERY CAPACITY	4x 4 kWh					
BATTERY NUMBER	4 interchangeable					
CHARGE TIME	5.3 - 12 hours (depending on charger)					
DRIVE DESCRIPTION	Proprietary Electric Transaxle					
MAX SPEED FWD/REV (APPROX)	17.7km/h / 8.8km/h (11mph / 5.5mph)					
DECK TYPE	Side Discharge	Rear Discharge	Side Discharge	Rear Discharge	Side Discharge	Rear Discharge
MULCH KIT	Optional	—	Optional	—	Optional	—
DECK MATERIAL	4.5 mm sheet steel					
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated
SPINDLES	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.
DECK LIFT SYSTEM	Foot Operated					
CUTTING WIDTH	122cm (48")	122cm (48")	132cm (52")	132cm (52")	152cm (60")	152cm (60")
CUTTING HEIGHTS	3.8cm (1.5") – 12.7cm (5")					
CUTTING POSITIONS	15	15	15	15	15	15
FRONT AXLE	Fixed, greasable caster fork tubes					
WHEELS (FRONT)	33cm x 16.5cm (13" x 6.5-6")					
WHEELS (BACK)	55.9cm x 25.4cm (22" x 10"-12")	55.9cm x 25.4cm (22" x 10"-12")	55.9cm x 25.4cm (22" x 10.5"-12")	55.9cm x 25.4cm (22" x 10.5"-12")	55.9cm x 25.4cm (22" x 12"-12")	55.9cm x 25.4cm (22" x 12"-12")
LED INTERFACE W/ HOUR COUNTER & 2 USB CHARGING SOCKETS	Standard	Standard	Standard	Standard	Standard	Standard
SEAT	Full suspension, adjustable seat with high backrest and armrests	Full suspension, adjustable seat with high backrest and armrests	Full suspension, adjustable seat with high backrest and armrests	Full suspension, adjustable seat with high backrest and armrests	Full suspension, adjustable seat with high backrest and armrests	Full suspension, adjustable seat with high backrest and armrests
WEIGHT	572kg (1,261lbs)	584kg (1,286lbs)	5834kg (1,284lbs)	590kg (1,301lbs)	595kg (1,312lbs)	602kg (1,326lbs)
LENGTH	211cm (83")	211cm (83")	211cm (83")	211cm (83")	211cm (83 in)	211cm (83")
WIDTH	160cm (63") w/ chute	124 cm (49")	171cm (67") w/ chute	137cm (54")	190cm (75") w/ chute	156.5cm (62")
HEIGHT	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up	124.5cm (49") w/ ROPS folded down 182.9cm (72") w/ ROPS up
WARRANTY (MACHINE)*	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)
WARRANTY (BATTERY)*	3 Year					
WARRANTY (DECK SHELL & FRAME)*	Limited lifetime					
ATTACHMENTS & ACCESSORIES	See page 56 / 57					

	ARROW E 48	ARROW E 48R	ARROW E 52	ARROW E 52R
MODEL #	998301	998304	998302	998305
BATTERY TYPE	56V FusionCore Lithium Ion Swappable			
BATTERY CAPACITY	4x 4 kWh	4x 4 kWh	4x 4 kWh	4x 4 kWh
BATTERY NUMBER	4 interchangeable	4 interchangeable	4 interchangeable	4 interchangeable
CHARGE TIME	5.3 - 12 hours (depending on charger)			
DRIVE SYSTEM	Proprietary Electric Transaxle	Proprietary Electric Transaxle	Proprietary Electric Transaxle	Proprietary Electric Transaxle
MAX SPEED FWD/REV (APPROX)	17.7km/h / 8.8km/h (11mph / 5.5mph)			
DECK TYPE	Side discharge	Rear discharge	Side discharge	Rear discharge
MULCH KIT	Optional	—	Optional	—
DECK MATERIAL	4.5 mm sheet steel			
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated
SPINDLES	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.	FusionCore Direct Electric Drive brushless motors, 3x 3.5 kW max.
SPINDLE BEARINGS	Serviceable Bottom Bearing	Serviceable Bottom Bearing	Serviceable Bottom Bearing	Serviceable Bottom Bearing
DECK LIFT SYSTEM	Foot pedal and hand lever			
CUTTING WIDTH	122cm (48")	122cm (48")	132cm (52")	132cm (52")
CUTTING HEIGHTS	3.8cm (1.5") – 12.7cm (5")			
CUTTING POSITIONS	15	15	15	15
FRONT AXLE	Fixed, greasable caster fork tubes			
WHEELS (FRONT)	Smooth 13 x 6.5-6 semi-pneumatic			
WHEELS (BACK)	20 X 10.5-8 Turf			
LED INTERFACE W/ HOUR COUNTER & 2 USB CHARGING SOCKETS	Standard	Standard	Standard	Standard
WEIGHT	546kg (1,204lbs)	545kg (1,203lbs)	562kg (1,240lbs)	561kg (1,236lbs)
LENGTH	189.2cm (74.5")	189.2cm (74.5")	189.2cm (74.5")	189.2cm (74.5")
WIDTH	127cm (50") w/o chute 157cm (62") w/ chute	127cm (50")	142cm (56") w/o chute 170cm (67") w/ chute	137cm (54")
HEIGHT	116.8cm (46")	116.8cm (46")	116.8cm (46")	116.8cm (46")
WARRANTY (MACHINE)*	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)	5 year / 1,500 hour (no hour limit for first 2 years)
WARRANTY (BATTERY)*	3 Year	3 Year	3 Year	3 Year
WARRANTY (DECK SHELL & FRAME)*	Limited lifetime	Limited lifetime	Limited lifetime	Limited lifetime
ATTACHMENTS & ACCESSORIES	See page 56 / 57			

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

# SPECIFICATIONS\*\*

	SUMMIT PRO 348	SUMMIT PRO 352	SUMMIT PRO 360	SUMMIT PRO 560	SUMMIT PRO 572	ZENITH 52	ZENITH 52R	ZENITH 60	ZENITH 60R
MODEL #	992331	992333	992332	992334	992335	991320	991321	991322	991323
ENGINE	Kawasaki FX801V	Kawasaki FX801V	Kawasaki FX801V	Kawasaki FX850V	Kawasaki FX850V	Kawasaki® FX730V	Kawasaki® FX730V	Kawasaki® FX730V	Kawasaki® FX730V
DISPLACEMENT	852 cm <sup>3</sup>	852 cm <sup>3</sup>	852 cm <sup>3</sup>	852 cm <sup>3</sup>	852 cm <sup>3</sup>	726cc	726cc	726cc	726cc
MAX. ENGINE POWER	18,5 kW / 24,8 hp at 3,600 U./min.	18,5 kW / 24,8 hp at 3,600 U./min.	18,5 kW / 24,8 hp at 3,600 U./min.	19,6 kW / 26,3 hp at 3,600 U./min.	19,6 kW / 26,3 hp at 3,600 U./min.	16,6 kW / 22,2 hp at 3,600 U./min.	16,6 kW / 22,2 hp at 3,600 U./min.	16,6 kW / 22,2 hp at 3,600 U./min.	16,6 kW / 22,2 hp at 3,600 U./min.
DRIVE SYSTEM	Parker® HTJ	Parker® HTJ	Parker® HTJ	Parker® HTG Heavy Duty	Parker® HTG Heavy Duty	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles	Hydro-Gear® ZT-3200 Transaxles
FUEL CAPACITY	48 litres	48 litres	48 litres	48 litres	48 litres	19.3 litres	19.3 litres	19.3 litres	19.3 litres
MAX GROUND SPEED (APPROX) (FWD/REV)	14.5 km/h 5.3 km/h	14.5 km/h 5.3 km/h	14.5 km/h 5.3 km/h	21.3 km/h 8.4 km/h	21.3 km/h 8.4 km/h	13.7km/h / 6.4km/h (8.5mph / 4mph)			
DECK TYPE	ENVY-PRO Side discharge	ENVY-PRO Side discharge	ENVY-PRO Side discharge	ENVY-PRO Side discharge	ENVY-PRO Side discharge	Side discharge	Rear discharge	Side discharge	Rear discharge
MULCHING KIT	Optional	Optional	Optional	Optional	Optional	Optional	–	Optional	–
DECK MATERIAL	4.6 mm, 12.5 mm edge reinforcement	4.6 mm, 12.5 mm edge reinforcement	3.6 mm sheet steel with double thickness around the spindles	3.6 mm sheet steel with double thickness around the spindles	3.6 mm sheet steel with double thickness around the spindles	3.6 mm sheet steel with double thickness around the spindles			
DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated
NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
SPINDLE MATERIAL	PRO-SPINDLES, Forged aluminium, sealed, 2x2 bearings	PRO-SPINDLES, Forged aluminium, sealed, 2x2 bearings	Forged Aluminium, sealed	Forged Aluminium, sealed	Forged Aluminium, sealed	Forged Aluminium, sealed			
BLADE DRIVE	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT	V-belt, CBT
DECK ENGAGEMENT	electric, with brake	electric, with brake	electric, with brake	electric, with brake	electric, with brake	Electric Ogura® GT1.5	Electric Ogura® GT1.5	Electric Ogura® GT1.5	Electric Ogura® GT1.5
DECK LIFT SYSTEM	Foot operated, spring assisted	Foot operated, spring assisted	Foot operated, spring assisted	Foot operated, spring assisted	Foot operated, spring assisted	Foot operated, spring assisted			
CUTTING WIDTH	48" 122 cm	52" 132 cm	60" 152 cm	60" 152 cm	72" 183 cm	132cm (52")	132cm (52")	152cm (60")	152cm (60")
CUTTING HEIGHTS	2.5 (1") – 12.7 cm (5")	2.5 (1") – 12.7 cm (5")	2.5 (1") – 12.7 cm (5")	2.5 (1") – 14 cm (5.5")	2.5 (1") – 14 cm (5.5")	3.8cm (1.5") – 12.7cm (5")			
CUTTING POSITIONS	18, via dial	18, via dial	18, via dial	18, via dial	18, via dial	15	15	15	15
WHEELS FRONT AXLE	Caster fork	Caster fork	Caster fork	Caster fork	Caster fork	Caster fork suspension	Caster fork suspension	Caster fork suspension	Caster fork suspension
WHEELS (FRONT)	(15" x 6-6") semi-pneumatic, puncture proof	(15" x 6-6") semi-pneumatic, puncture proof	33cm x 16.5cm (13" x 6.5-6")						
WHEELS (BACK)	(24" x 12-12")	(24" x 12-12")	(24" x 12-12")	(26" x 12-12")	(26" x 12-12")	55.9cm x 30.5cm (22" x 12"-12")			
SEAT	Full suspension high back seat with adjustable arm rests and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support	Adjustable, Fully pneumatic suspension, electrically adjustable to driver's weight, vibration isolators, arm rest and lumbar support	Adjustable, Fully pneumatic suspension, electrically adjustable to driver's weight, vibration isolators, arm rest and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support	Full suspension high back seat with adjustable arm rests and lumbar support
ROPS (ROLLOVER PROTECTION STRUCTURE)	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable	Standard, foldable
HOUR METER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
WEIGHT	618kg (1,363 lbs)	661kg (1,457 lbs)	675kg (1,488 lbs)	742kg (1,637 lbs)	792kg (1,747 lbs)	421 kg (928lbs)	411 kg (906 lbs)	429 kg (946 lbs)	422 kg (930 lbs)
LENGTH	211 cm (83")	211 cm (83")	211 cm (83")	214 cm (84")	219 cm (86")	206 cm (81")	206 cm (81")	206 cm (81")	206 cm (81")
WIDTH	160 cm (63") w/ chute, 130 cm with mulch kit	170 cm (67") w/ chute, 140 cm with mulch kit	191 cm (75") w/ chute, 160 cm with mulch kit	191 cm (75") w/ chute, 160 cm with mulch kit	221 cm (87") w/ chute, 191 cm with mulch kit	171 cm (67") w/ chute	137 cm (54")	190 cm (75") w/ chute	157 cm (62")
HEIGHT	122 cm (48") ROPS folded down, 193 cm (76") ROPS up	122 cm (48") ROPS folded down, 193 cm (76") ROPS up	122 cm (48") ROPS folded down, 193 cm (76") ROPS up	125 cm (49") ROPS folded down, 196 cm (77")ROPS up	125 cm (49") ROPS folded down, 196 cm (77")ROPS up	124.5cm (49") ROPS folded down 182.9cm (72")ROPS up	124.5cm (49") ROPS folded down 182.9cm (72")ROPS up	124.5cm (49") ROPS folded down 182.9cm (72")ROPS up	124.5cm (49") ROPS folded down 182.9cm (72")ROPS up
WARRANTY (MACHINE)*	5 Year / 1.250 Hour	5 Year / 1.250 Hour	5 Year / 1.250Hour	5 Year / 1.500 Hour	5 Year / 1.500 Hour	4 Year / 750 Hour	4 Year / 750 Hour	4 Year / 750 Hour	4 Year / 750 Hour
ATTACHMENTS & ACCESSORIES	See page 56 / 57								

See page 56 / 57

	ARROW 32	ARROW 36
MODEL #	994302	994303
ENGINE	Kawasaki® FS 600 V-Twin	Kawasaki® FS 600 V-Twin
DISPLACEMENT	603cc	603cc
DRIVE SYSTEM	Hydro-Gear® ZT-3100 Transaxle	Hydro-Gear® ZT-3100 Transaxle
FUEL CAPACITY	22.7 litres	22.7 litres
MAX GROUND SPEED (APPROXIMATE) (FWD/REV)	12.8km/h / 4.8km/h (8mph / 3mph)	12.8km/h / 4.8km/h (8mph / 3mph)
STARTER	Electric	Electric
DECK MATERIAL	4.5 mm sheet steel	4.5 mm sheet steel
DECK CONSTRUCTION	Welded	Welded
NUMBER OF SPINDLES	2	2
SPINDLE HOUSING	Forged Aluminium	Forged Aluminium
DECK DRIVE	Belt	Belt
DECK ENGAGEMENT	Electric Clutch	Electric Clutch
DECK LIFT SYSTEM	Foot pedal and hand lever	Foot pedal and hand lever
CUTTING WIDTH	81cm (32")	91cm (36")
CUTTING HEIGHTS	3.8cm - 12.7cm (1.5" - 5.0")	3.8cm - 12.7cm (1.5" - 5.0")
CUTTING POSITIONS	15	15
WHEELS (FRONT)	11 x 4.00-5 semi-pneumatic	11 x 4.00-5 semi-pneumatic
WHEELS (BACK)	18 x 6.50 - 8 radial	18 x 8.50 - 8 radial
WEIGHT	351kg (774lbs)	357kg (787lbs)
LENGTH	160cm (63")	160cm (63")
WIDTH	85.1cm (33.5")	92.7cm (36.5")
HEIGHT	121.9cm (48")	121.9cm (48")
WARRANTY (MACHINE)*	5 Year / 1000 Hour No hour limit first 2 years	5 Year / 1000 Hour No hour limit first 2 years
WARRANTY (DECK SHELL & FRAME)*	Limited lifetime	Limited lifetime
ATTACHMENTS & ACCESSORIES	See page 56 / 57	

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

# SPECIFICATIONS\*\*

	<b>APEX 48</b>	<b>APEX 48R</b>	<b>APEX 52</b>	<b>APEX 52R</b>
<b>MODEL #</b>	991324	991325	991326	991327
<b>ENGINE</b>	Kawasaki® FR691 V-Twin	Kawasaki® FR691 V-Twin	Kawasaki® FR691 V-Twin	Kawasaki® FR691 V-Twin
<b>DISPLACEMENT</b>	726cc	726cc	726cc	726cc
<b>DRIVE SYSTEM</b>	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles
<b>FUEL CAPACITY</b>	19.3 litres	19.3 litres	19.3 litres	19.3 litres
<b>MAX GROUND SPEED (APPROX) (FWD/REV)</b>	12.9km/h / 6.4km/h (8mph / 4mph)			
<b>DECK TYPE</b>	Side discharge	Rear discharge	Side discharge	Rear discharge
<b>DECK MATERIAL</b>	3.6 mm sheet steel with double thickness around the blade carrier	3.6 mm sheet steel with double thickness around the blade carrier	3.6 mm sheet steel with double thickness around the blade carrier	3.6 mm sheet steel with double thickness around the blade carrier
<b>DECK CONSTRUCTION</b>	Fabricated	Fabricated	Fabricated	Fabricated
<b>NUMBER OF SPINDLES</b>	3	3	3	3
<b>SPINDLE MATERIAL</b>	Forged Aluminium	Forged Aluminium	Forged Aluminium	Forged Aluminium
<b>SPINDLE SHAFT</b>	Steel, StressProof®	Steel, StressProof®	Steel, StressProof®	Steel, StressProof®
<b>DECK ENGAGEMENT</b>	Electric Ogura	Electric Ogura	Electric Ogura	Electric Ogura
<b>DECK LIFT SYSTEM</b>	Foot Operated	Foot Operated	Foot Operated	Foot Operated
<b>CUTTING WIDTH</b>	122cm (48")	122cm (48")	132cm (52")	132cm (52")
<b>CUTTING HEIGHTS</b>	3.8cm (1.5") - 12.7cm (5")			
<b>CUTTING POSITIONS</b>	15	15	15	15
<b>WHEELS (FRONT)</b>	33cm x 16.5cm (13" x 6.5-6")			
<b>WHEELS (BACK)</b>	55.9cm x 24.1-30.5cm (22" x 9.5-12")			
<b>SEAT</b>	High Back Premium w/ Padded Armrests			
<b>HOUR METER</b>	Standard	Standard	Standard	Standard
<b>WEIGHT</b>	374.2kg (825lbs)	371.2kg (818lbs)	395kg (871lbs)	388.9kg (857lbs)
<b>LENGTH</b>	200.6cm (79")	200.6cm (79")	200.6cm (79")	200.6cm (79")
<b>WIDTH</b>	160cm (63")	124cm (49")	170cm (67")	137cm (54")
<b>HEIGHT</b>	119.3cm (47")	119.3cm (47")	119.3cm (47")	119.3cm (47")
<b>WARRANTY (MACHINE)*</b>	4 Year / 500 Hour			
<b>ATTACHMENTS &amp; ACCESSORIES</b>	See page 56 / 57			

	<b>IKON 42</b>	<b>IKON 52</b>	<b>EDGE 34</b>	<b>EDGE 42</b>
<b>MODEL #</b>	918300	918301	915338	915339
<b>ENGINE</b>	Kawasaki® FR651	Kawasaki® FR691	Ariens	Ariens
<b>DISPLACEMENT</b>	726cc	726cc	635cc	635cc
<b>DRIVE SYSTEM</b>	Hydro-Gear® EZT 2200 Transaxles	Hydro-Gear® EZT 2200 Transaxles	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZT Transaxles
<b>FUEL CAPACITY</b>	13.2 litres	13.2 litres	7.5 litres	7.5 litres
<b>MAX GROUND SPEED (APPROX) (FWD/REV)</b>	11.3km/h / 4.8km/h (7mph / 3mph)	11.3km/h / 4.8km/h (7mph / 3mph)	9.6km/h / 4.8km/h (6mph / 3mph)	9.6km/h / 4.8km/h (6mph / 3mph)
<b>DECK TYPE</b>	Side discharge	Side discharge	Side discharge	Side discharge
<b>DECK MATERIAL</b>	2.9 mm sheet steel with double thickness around blade carrier	2.9 mm sheet steel with double thickness around blade carrier	2.9 mm sheet steel with double thickness around blade carrier	2.9 mm sheet steel with double thickness around blade carrier
<b>DECK CONSTRUCTION</b>	Fabricated	Fabricated	Stamped	Fabricated
<b>NUMBER OF SPINDLES</b>	3	3	2	2
<b>SPINDLE SHAFT</b>	Forged aluminium	Forged aluminium	Steel	Steel
<b>DECK ENGAGEMENT</b>	Electric Warner	Electric Warner	Electric Warner	Electric Warner
<b>DECK LIFT SYSTEM</b>	Foot Operated	Foot Operated	Foot Operated	Foot Operated
<b>CUTTING WIDTH</b>	107cm (42")	132cm (52")	86cm (34")	107cm (42")
<b>CUTTING HEIGHTS</b>	3.8-11.4cm (1.5"-4.5")	3.8-11.4cm (1.5"-4.5")	3.8-11.4cm (1.5"-4.5")	3.8-11.4cm (1.5"-4.5")
<b>CUTTING POSITIONS</b>	13	13	7	7
<b>WHEELS (FRONT)</b>	11" x 6-5"	11" x 6-5"	27.9cm x 10.2cm (11" x 4")	27.9cm x 10.2cm (11" x 4")
<b>WHEELS (BACK)</b>	50.8cm x 20.3-20.3cm (20" x 8-8")	50.8cm x 25.4-20.3cm (20" x 10-8")	45.7cm x 16.5-20.3cm (18" x 6.5-8")	45.7cm x 16.5-20.3cm (20" x 8-8")
<b>SEAT</b>	High Back w/ Armrests	High Back w/ Armrests	High Back w/ Seat Springs	High Back w/ Seat Springs
<b>HOUR METER</b>	Standard	Standard	Standard	Standard
<b>WEIGHT</b>	297kg (655lbs)	310kg (683lbs)	202.7kg (447lbs)	231.3kg (510lbs)
<b>LENGTH</b>	190cm (75")	190cm (75")	172.7cm (68")	172.7cm (68")
<b>WIDTH</b>	142cm (56")	168cm (66")	113.8cm (44.8")	139.2cm (54.8")
<b>HEIGHT</b>	117cm (46")	117cm (46")	99.8cm (39.3")	102.9cm (40.5")
<b>WARRANTY (MACHINE)*</b>	3 Year / 300 Hours	3 Year / 300 Hours	2 Year / 150 Hours	2 Year / 150 Hour
<b>ATTACHMENTS &amp; ACCESSORIES</b>	See page 56 / 57			

\* The current general warranty terms and conditions of the AriensCo GmbH, Germany apply.

\*\* Please refer to the applicable operating instructions for definitive technical specifications and values.

**TO FIND YOUR NEAREST ARIENS  
DEALER VISIT [ARIENS.EU](http://ARIENS.EU)**

Authorised Ariens dealers are an essential part of the purchasing experience and on-going aftercare of our products. Be assured that as garden machinery specialists with first class product training, our dealers are experts in finding the right Ariens model to suit your requirements. They have the ability to demonstrate first hand the many benefits of owning an Ariens.

Only through our specialist dealers will you receive entitlements such as warranties, product inspections and safety checks on delivery – and have total confidence in the training and advice you will receive. Furthermore, they will carry out the necessary servicing and provide ongoing maintenance advice if required.



Visit us online: [www.riens.eu](http://www.riens.eu)

For product information, customer reviews, product videos, dealer locator and customer support



AriensCo GmbH  
Ellwanger Straße 15  
74424 Buehlertann  
Germany

+49 (0)7973/9123-0  
info-eu@ariensco.com  
www.ariens.eu

© COPYRIGHT 10/2025

Subject to changes and errors. No claims can be derived from information or illustrations.

® Registered trademark and trademark of Ariens Company.

Kawasaki®, Hydro-Gear®, Michelin Tweels® and Parker® are registered trademarks of their respective companies.



**ARIENS®**